




Manual for our LED-mirrors






LED-lights

Lighting Kelvin range: 3500k - 6500k

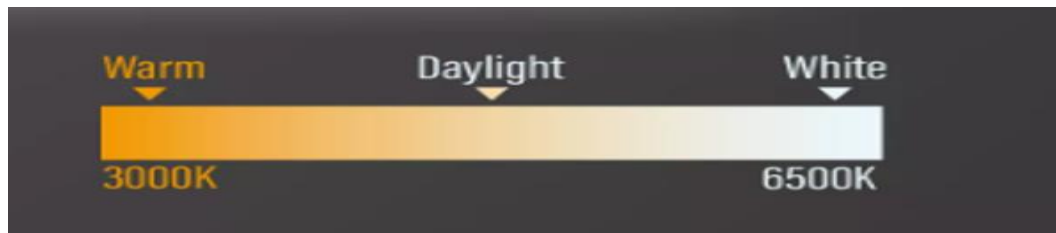

Warm light daylight Cold light



How to switch on/off the LED-light?

Use the on/off button to trigger the LED light.

To change the color of the light, touch the on/off button for a longer period of time. The light will alternate between cold and warm white.

How to install mirrors

Requirements:



Drill



Screw driver



Hammer




Tape measure




Pencil



For size 1200x1000mm

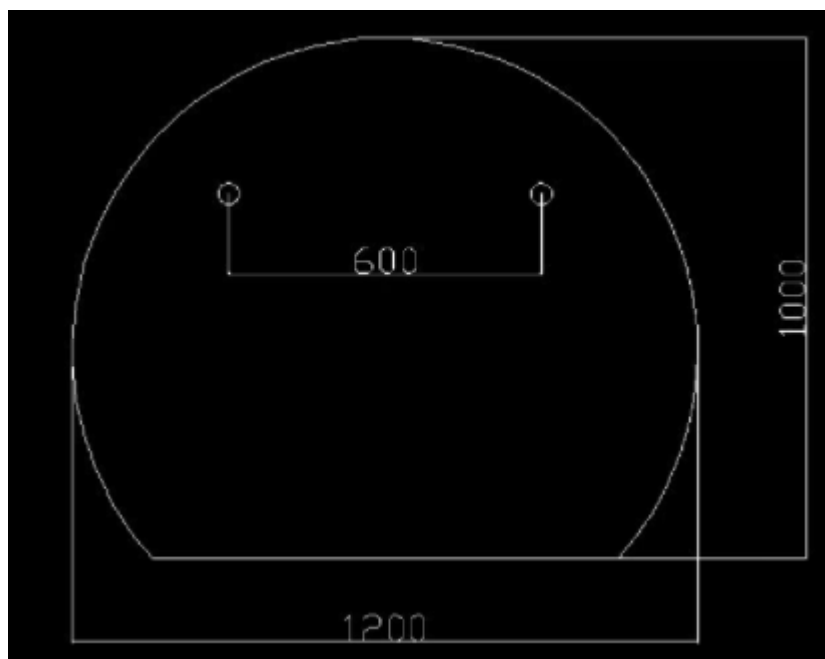


- 1 Start by drilling a hole in the wall, where you would like to hang the mirror.
- 2 To set the screw correctly, use a plastic plug first. Then insert the screw.
- 3 Be sure to leave 1,5 - 2 cm on the screw to hang the mirror.
- 4 Once you're done, hang up the mirror and make sure it is secure and stable.

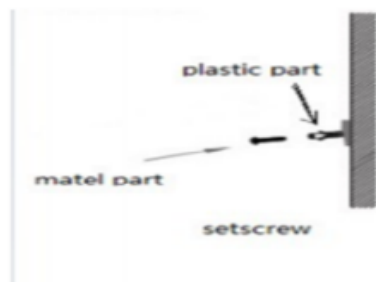

Power supplier Place back of mirror

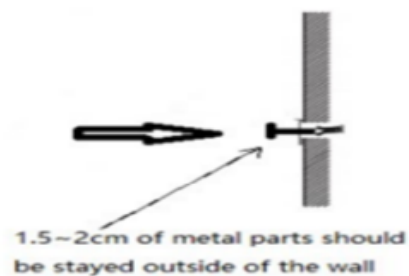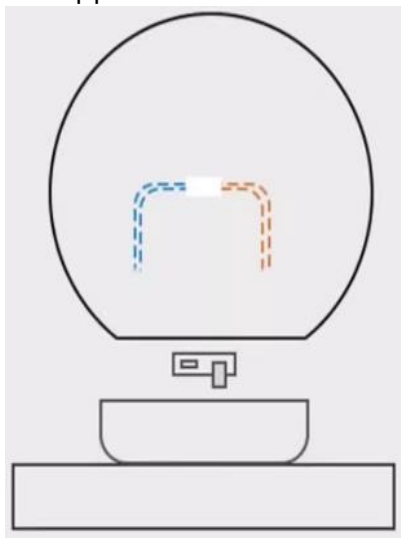

Power supplier out of mirror

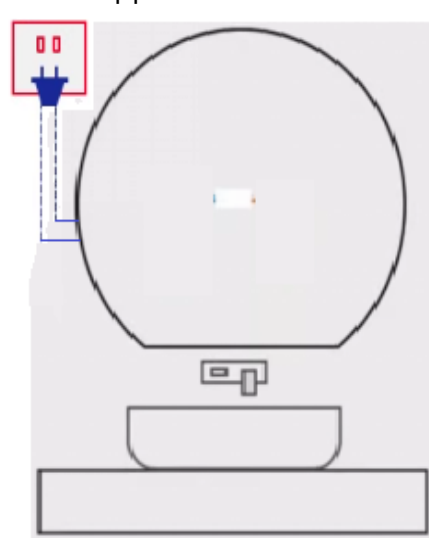

Instruction for Anti-Fog

Anti-fog:

- 1 If your mirror has an anti-fog function, you can trigger the heating by pressing the anti-fog button.
- 2 Once it is turned on, a heating symbol will be displayed.
- 3 To turn off the anti-fog function, simply press the anti-fog button again.

DETAILS OF MIRROR DEFOGGER

MIRROR DEFOGGER

CE ROHS IP54 □

Code : XH-3040

Size: 300*400mm

Shape: quadrate

Rating: 220-240V/50-60HZ

Input: $\leq 2.5W/dm^2$

Date: 2024

Temperature rise: 10-20°C

Test: QC-Q4