



Manual

PRM0435

UNIFORMA TROPICAL RAIN XL SHOWER HEAD

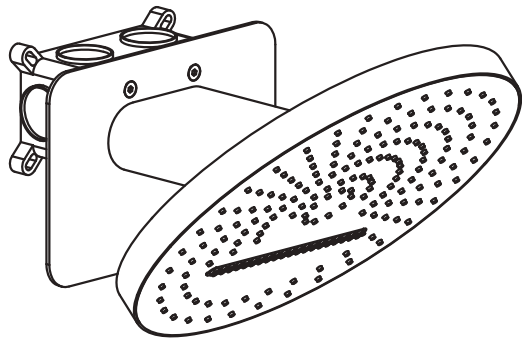


1

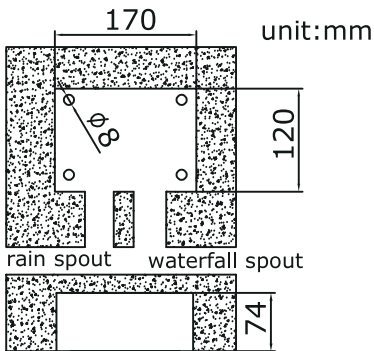

embedded box surface flat with tile surface
according to the figure above, excavate the embedded
size of the wall and according to the shower valve fixed
hole dimensions in the slot bottom drilling, pay
attention to distinguish the shower inlet And the choice
of waterfall inlet


2

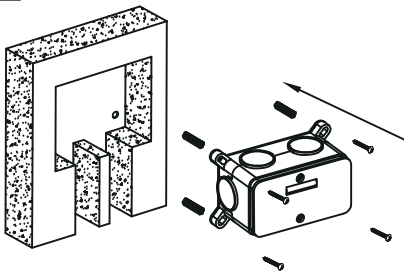

particles are inserted into the hole and used for
self-working screw fixed concealed shower valve,
reference level bit ensure level, cement seal wall do
not put remove transparent protective cover to avoid
cement spatter onto copper parts (protective box
must be higher than tile surface)


Subject to changes and printing errors.

3

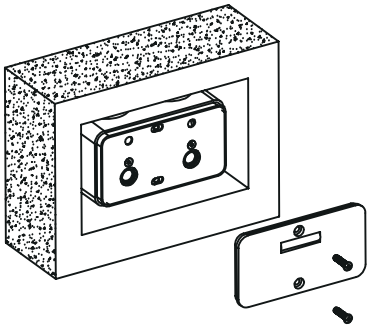


after installing the concealed shower valve,
remove transparent protective cover first.

4

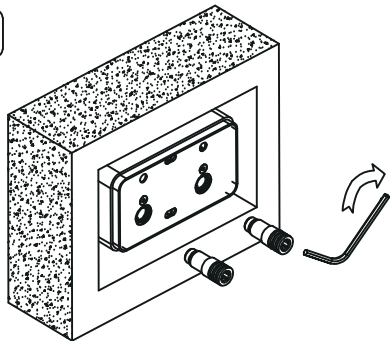


use a hex key to install the water outlet
connector on the concealed shower valve

5




install the showerhead on the water outlet
body On (nut tightened)

6

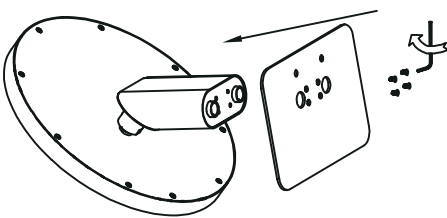


secure the panel to the water outlet body
with M4 flat head screws

7

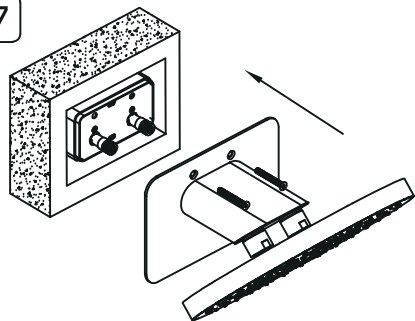

install the showerhead on the water outlet
connector,fasten with M6 flat head screws

8



after installation, open the switch to
check the showerhad water condition
and whether there is leakage

Subject to changes and printing errors.

Maintenance and cleaning Instructions for faucets, overhead and hand showers

To keep your faucets, overhead and hand showers made of metal or plastic in optimal condition, it is important to rinse off soap and/or toothpaste residues immediately after use and to thoroughly dry the product. Always use a soft sponge or cloth for this purpose. This helps maintain its aesthetic appearance and extends the lifespan of your product.

Important notes:

Metal products can react to cleaning agents containing acids and chlorine. This reaction may lead to discoloration and damage to the surface, which is difficult or impossible to repair.

Cleaning Tips:

- After use, rinse with cold water and dry with a soft, non -abrasive cloth.
- Use mild cleaning agents such as green soap.
- Clean with a cleaner specifically designed for metal (suitable for the type of metal of the faucet).
- Cleaning the perlator: Clean the aerator: If the faucet is equipped with a removable aerator, let it soak for a maximum of 5 minutes in a solution of citric acid -based cleaner. Rinse it thoroughly and then reattach the aerator to the faucet.
- Cleaning overhead and hand showers: The silicone anti -lime nozzles are easy to clean by rubbing them with a circular motion using your fingers. This works best when the shower is in use, as you can immediately see if the spray nozzles are clear. For more stubborn limescale, we recommend cleaning the main or hand shower again with a cleaner specifically designed for this purpose.



What Not to Do:

- Do not use cleaning agents containing alcohol, salt, acetic acid, other aggressive acids, or chlorine.
- Do not use phosphorous -containing (professional) cleaners.
- Do not mix different cleaning agents.
- Avoid aggressive cleaning agents, abrasives, scrubbing pads, or microfiber cloths.
- Do not allow cleaning products to sit on the surface.
- Always apply cleaning products to a cloth or sponge first, not directly to the surface being cleaned.
- Note: Skincare products such as shampoo, shower gel, and liquid soap may cause damage.

Water Softeners:

Water softeners can be harmful to metals, protective coatings, and color layers of products, especially in the case of low -quality or poorly maintained water softeners. With a low dH setting, the risk of damage increases. We advise not setting the water softener lower than 4 dH.

Note: Damage caused by incorrect cleaning or improper water softener settings is not covered by the warranty.

Subject to changes and printing errors.