
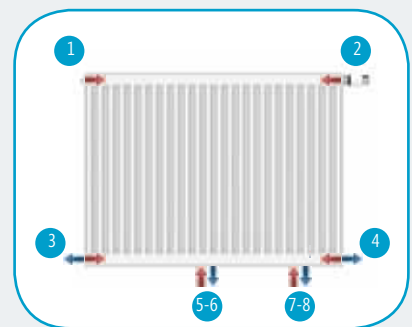


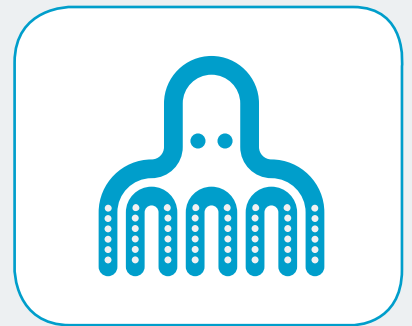

## DISCOVER NOVELLO 8

UNIVERSAL AND FLEXIBLE,  
THE RADIATOR WITH 10 CONNECTION POSSIBILITIES AND  
A CONSTANT WALL DISTANCE OF 65 MM AT THE CENTRE CONNECTION

## General information

### NOVELLO 8

The Novello 8 radiator is a fully encased radiator equipped with an integrated adjustable valve insert. Furthermore you have, thanks to the 4 side- and 4 bottom connections, a variety of connection possibilities. This makes the Novello 8 easy to install and applicable in about every situation. In addition, it offers a uniform wall distance of 65 mm for all types at the center connection.

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product:                    | the fully encased valve radiator with 8 connections                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Finishing:                  | upper grille and side panels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Pre-installed:              | preset Heimeier 4368 or 4369 valve insert, air vent and blind plugs                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Valve insert:               | The integrated adjustable valve insert (without thermostatic head) is factory-fit on the right side of the radiator, CEN certified, tested in accordance with EN215 and compatible with thermostatic heads M30 x 1,5 mm. The thermostatic valve insert is factory-set in relation to the size of the radiator. This presetting ensures optimum throughput in the radiator. Factory setting for two-pipe systems, also suitable for one-pipe systems (as long as the valve insert is adjusted to position 8). |
| Also supplied:              | Monclac brackets with anti-lift (VDI compliant when used in combination with included anti-slide clips), screws, plugs and installation instructions                                                                                                                                                                                                                                                                                                                                                         |
| Connections:                | 4 x ¾" male Eurocone bottom connection (2 x centre and 2 x lateral) and 4 x ½" female side connection. Uniform wall distance of 65 mm for all types at the centre connection. Left handed version: type 21, 22 and 33 are reversible. Reversing types 22 or 33 will modify the centre to wall distance of 65 mm.                                                                                                                                                                                             |
| Lugs:                       | Type 11 is equipped with 2 pairs of mounting lugs up to 1.600 mm and 3 pairs from 1.800 mm                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Packaging:                  | Every radiator is sturdily packaged in high-quality cardboard and wrapped in plastic. The radiator's characteristics are shown on the label: type – height – length.                                                                                                                                                                                                                                                                                                                                         |
| Warranty:                   | 10 years, as long as the installation instructions have been followed and Stelrad's warranty conditions have been met.                                                                                                                                                                                                                                                                                                                                                                                       |
| Paint process:              | All radiators are degreased, phosphated, cathodically primed and powder-coated in Stelrad white 9016 as standard.                                                                                                                                                                                                                                                                                                                                                                                            |
| Colours:                    | Stelrad white 9016 + 35 different Stelrad colours and about 200 RAL-colours are possible                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Heat cost allocator:        | Suitable for heat cost allocators, both electronic and according to the evaporation principle (covered by the norm of EN834 & EN835).                                                                                                                                                                                                                                                                                                                                                                        |
| Max. operating pressure:    | 10 bar (tested to 13 bar)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Max. operating temperature: | 110 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Conformity:                 | in accordance with EN442                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Quality assurance:          | NF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Types:                      | 11   21   22   33                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Heights:                    | 300   400   500   600   700   900 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Lengths:                    | 400 – 3.000 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Depths:                     | 61   77   100   158 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |




## Type overview

Calculation factor  
per meter  
at 75/65/20°C  
according to EN442

Characteristic equation:

$$\Phi = K_M \times \Delta T^n$$

\* centre connection only

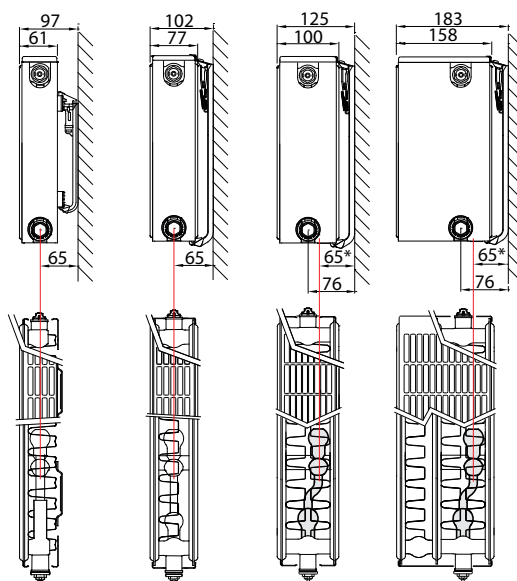

| Height |    | Type 11 | Type 21 | Type 22 | Type 33 | Centre distance |
|--------|----|---------|---------|---------|---------|-----------------|
| 300    | W  | 509     | 745     | 982     | 1.349   | 250             |
|        | kg | 9,31    | 14,29   | 16,80   | 25,20   |                 |
|        | l  | 1,89    | 3,70    | 3,70    | 5,40    |                 |
|        | m² | 2,09    | 2,44    | 3,51    | 5,26    |                 |
|        | n  | 1,32    | 1,33    | 1,33    | 1,31    |                 |
| 400    | W  | 676     | 954     | 1.245   | 1.711   | 350             |
|        | kg | 12,78   | 19,46   | 22,87   | 34,30   |                 |
|        | l  | 2,34    | 4,67    | 4,67    | 6,87    |                 |
|        | m² | 2,95    | 3,37    | 4,92    | 7,38    |                 |
|        | n  | 1,31    | 1,33    | 1,33    | 1,32    |                 |
| 500    | W  | 833     | 1.153   | 1.494   | 2.056   | 450             |
|        | kg | 16,24   | 24,63   | 28,93   | 43,40   |                 |
|        | l  | 2,80    | 5,63    | 5,63    | 8,33    |                 |
|        | m² | 3,80    | 4,31    | 6,33    | 9,49    |                 |
|        | n  | 1,30    | 1,34    | 1,33    | 1,32    |                 |
| 600    | W  | 980     | 1.345   | 1.732   | 2.389   | 550             |
|        | kg | 19,70   | 29,80   | 35,00   | 52,50   |                 |
|        | l  | 3,25    | 6,60    | 6,60    | 9,80    |                 |
|        | m² | 4,66    | 5,24    | 7,74    | 11,61   |                 |
|        | n  | 1,29    | 1,34    | 1,33    | 1,32    |                 |
| 700    | W  | 1.117   | 1.530   | 1.961   | 2.712   | 650             |
|        | kg | 22,90   | 34,50   | 40,53   | 60,77   |                 |
|        | l  | 3,77    | 7,63    | 7,63    | 11,37   |                 |
|        | m² | 5,51    | 6,18    | 9,15    | 13,72   |                 |
|        | n  | 1,29    | 1,34    | 1,34    | 1,34    |                 |
| 900    | W  | 1.360   | 1.883   | 2.395   | 3.334   | 850             |
|        | kg | 29,30   | 43,90   | 51,60   | 77,30   |                 |
|        | l  | 4,80    | 9,70    | 9,70    | 14,50   |                 |
|        | m² | 7,22    | 8,05    | 11,97   | 17,96   |                 |
|        | n  | 1,29    | 1,34    | 1,35    | 1,37    |                 |

W=heat output per meter / kg=weight per meter / l=content per meter / m²=surface per meter / n=exponent  
The manufacturer reserves the right to alter any of the specifications shown in this document without prior notice.

## NOVELLO 8

Heat outputs according to EN442



**EN442 (W) 70/50/20°C**

**EN442 (W) 55/45/20°C**

Stelrad BV: PL25/0004/E007

| Height            | 300                      |                            |                              |                              |
|-------------------|--------------------------|----------------------------|------------------------------|------------------------------|
| Type              | 11                       | 21                         | 22                           | 33                           |
| W/m<br>75/65/20°C | 509                      | 745                        | 982                          | 1.349                        |
| <b>400</b>        | 152<br>104<br>0661031104 | 221<br>151<br>0662032104   | 292<br>200<br>0662032204     | 403<br>276<br>0662033304     |
| <b>500</b>        | 189<br>129<br>0661031105 | 276<br>189<br>0662032105   | 365<br>249<br>0662032205     | 503<br>345<br>0662033305     |
| <b>600</b>        | 227<br>155<br>0661031106 | 332<br>227<br>0662032106   | 438<br>299<br>0662032206     | 603<br>414<br>0662033306     |
| <b>700</b>        | 265<br>181<br>0661031107 | 388<br>265<br>0662032107   | 511<br>349<br>0662032207     | 704<br>483<br>0662033307     |
| <b>800</b>        | 303<br>207<br>0661031108 | 443<br>302<br>0662032108   | 585<br>399<br>0662032208     | 805<br>552<br>0662033308     |
| <b>900</b>        | 341<br>233<br>0661031109 | 498<br>340<br>0662032109   | 658<br>449<br>0662032209     | 906<br>621<br>0662033309     |
| <b>1000</b>       | 379<br>259<br>0661031110 | 554<br>378<br>0662032110   | 730<br>499<br>0662032210     | 1.006<br>690<br>0662033310   |
| <b>1100</b>       | 417<br>285<br>0661031111 | 609<br>416<br>0662032111   | 803<br>548<br>0662032211     | 1.107<br>759<br>0662033311   |
| <b>1200</b>       | 455<br>311<br>0661031112 | 664<br>453<br>0662032112   | 876<br>598<br>0662032212     | 1.208<br>828<br>0662033312   |
| <b>1400</b>       | 531<br>363<br>0661031114 | 775<br>529<br>0662032114   | 1.023<br>698<br>0662032214   | 1.409<br>966<br>0662033314   |
| <b>1600</b>       |                          | 886<br>604<br>0662032116   | 1.169<br>798<br>0662032216   | 1.610<br>1.103<br>0662033316 |
| <b>1800</b>       |                          | 997<br>680<br>0662032118   | 1.315<br>898<br>0662032218   | 1.811<br>1.241<br>0662033318 |
| <b>2000</b>       |                          | 1.107<br>755<br>0662032120 | 1.461<br>997<br>0662032220   | 2.012<br>1.379<br>0662033320 |
| <b>2200</b>       |                          | 1.218<br>831<br>0662032122 | 1.607<br>1.097<br>0662032222 | 2.214<br>1.517<br>0662033322 |
| <b>2400</b>       |                          | 1.329<br>907<br>0662032124 | 1.753<br>1.197<br>0662032224 | 2.415<br>1.655<br>0662033324 |
| <b>2600</b>       |                          |                            | 1.899<br>1.297<br>0662032226 |                              |
| <b>2800</b>       |                          |                            | 2.045<br>1.397<br>0662032228 |                              |
| <b>3000</b>       |                          |                            | 2.191<br>1.496<br>0662032230 |                              |

| 400                        |                              |                              |                              |
|----------------------------|------------------------------|------------------------------|------------------------------|
| 11                         | 21                           | 22                           | 33                           |
| 676                        | 954                          | 1.245                        | 1.711                        |
| 201<br>138<br>0661041104   | 284<br>193<br>0662042104     | 370<br>253<br>0662042204     | 510<br>349<br>0662043304     |
| 252<br>173<br>0661041105   | 354<br>241<br>0662042105     | 462<br>315<br>0662042205     | 638<br>437<br>0662043305     |
| 303<br>208<br>0661041106   | 425<br>290<br>0662042106     | 555<br>379<br>0662042206     | 766<br>524<br>0662043306     |
| 353<br>242<br>0661041107   | 496<br>338<br>0662042107     | 648<br>442<br>0662042207     | 893<br>611<br>0662043307     |
| 404<br>277<br>0661041108   | 567<br>386<br>0662042108     | 740<br>505<br>0662042208     | 1.020<br>699<br>0662043308   |
| 454<br>311<br>0661041109   | 638<br>435<br>0662042109     | 833<br>568<br>0662042209     | 1.148<br>786<br>0662043309   |
| 504<br>346<br>0661041110   | 709<br>483<br>0662042110     | 925<br>631<br>0662042210     | 1.275<br>873<br>0662043310   |
| 555<br>381<br>0661041111   | 779<br>531<br>0662042111     | 1.018<br>695<br>0662042211   | 1.403<br>960<br>0662043311   |
| 605<br>415<br>0661041112   | 850<br>580<br>0662042112     | 1.111<br>758<br>0662042212   | 1.530<br>1.048<br>0662043312 |
| 706<br>484<br>0661041114   | 992<br>676<br>0662042114     | 1.296<br>884<br>0662042214   | 1.785<br>1.222<br>0662043314 |
| 807<br>554<br>0661041116   | 1.134<br>773<br>0662042116   | 1.481<br>1.010<br>0662042216 | 2.041<br>1.397<br>0662043316 |
| 908<br>623<br>0661041118   | 1.275<br>869<br>0662042118   | 1.666<br>1.137<br>0662042218 | 2.296<br>1.572<br>0662043318 |
| 1.009<br>692<br>0661041120 | 1.417<br>966<br>0662042120   | 1.851<br>1.263<br>0662042220 | 2.551<br>1.746<br>0662043320 |
|                            | 1.559<br>1.063<br>0662042122 | 2.036<br>1.389<br>0662042222 | 2.806<br>1.921<br>0662043322 |
|                            | 1.701<br>1.159<br>0662042124 | 2.221<br>1.515<br>0662042224 | 3.061<br>2.095<br>0662043324 |
|                            |                              | 2.406<br>1.642<br>0662042226 |                              |
|                            |                              | 2.591<br>1.768<br>0662042228 |                              |
|                            |                              | 2.776<br>1.894<br>0662042230 |                              |

| 500                          |                              |                              |                              |
|------------------------------|------------------------------|------------------------------|------------------------------|
| 11                           | 21                           | 22                           | 33                           |
| 833                          | 1.153                        | 1.494                        | 2.056                        |
| 249<br>171<br>0661051104     | 342<br>233<br>0662052104     | 444<br>303<br>0662052204     | 612<br>419<br>0662053304     |
| 311<br>214<br>0661051105     | 428<br>291<br>0662052105     | 555<br>378<br>0662052205     | 766<br>524<br>0662053305     |
| 374<br>257<br>0661051106     | 514<br>350<br>0662052106     | 666<br>454<br>0662052206     | 919<br>629<br>0662053306     |
| 436<br>300<br>0661051107     | 599<br>408<br>0662052107     | 777<br>530<br>0662052207     | 1.072<br>733<br>0662053307   |
| 498<br>343<br>0661051108     | 684<br>466<br>0662052108     | 888<br>605<br>0662052208     | 1.225<br>838<br>0662053308   |
| 561<br>386<br>0661051109     | 771<br>525<br>0662052109     | 999<br>681<br>0662052209     | 1.378<br>943<br>0662053309   |
| 623<br>428<br>0661051110     | 856<br>583<br>0662052110     | 1.110<br>757<br>0662052210   | 1.531<br>1.047<br>0662053310 |
| 685<br>471<br>0661051111     | 941<br>641<br>0662052111     | 1.221<br>832<br>0662052211   | 1.685<br>1.152<br>0662053311 |
| 748<br>514<br>0661051112     | 1.027<br>700<br>0662052112   | 1.332<br>908<br>0662052212   | 1.838<br>1.257<br>0662053312 |
| 872<br>600<br>0661051114     | 1.198<br>816<br>0662052114   | 1.554<br>1.059<br>0662052214 | 2.144<br>1.466<br>0662053314 |
| 997<br>686<br>0661051116     | 1.370<br>933<br>0662052116   | 1.776<br>1.210<br>0662052216 | 2.451<br>1.676<br>0662053316 |
| 1.121<br>771<br>0661051118   | 1.540<br>1.049<br>0662052118 | 1.998<br>1.362<br>0662052218 | 2.757<br>1.886<br>0662053318 |
| 1.246<br>857<br>0661051120   | 1.712<br>1.166<br>0662052120 | 2.220<br>1.513<br>0662052220 | 3.063<br>2.095<br>0662053320 |
| 1.371<br>943<br>0661051122   | 1.883<br>1.283<br>0662052122 | 2.442<br>1.665<br>0662052222 | 3.369<br>2.304<br>0662053322 |
| 1.495<br>1.028<br>0661051124 | 2.054<br>1.399<br>0662052124 | 2.664<br>1.816<br>0662052224 | 3.675<br>2.514<br>0662053324 |
|                              |                              | 2.885<br>1.967<br>0662052226 |                              |
|                              |                              | 3.108<br>2.118<br>0662052228 |                              |
|                              |                              | 3.330<br>2.270<br>0662052230 |                              |

Core assortment (Stelrad white 9016) available ex factory within 10 days.


Core assortment is subject to change, please refer to [www.stelrad.eu](http://www.stelrad.eu) for the latest information.

Delivery time depends on the model, please refer to your distributor.

# NOVELLO 8

On the label:  
8-CONNECTIONS

Art. 0662 06 22 04



Stielrad BV: PL25/0004/E007

| Height            | 600                          |                              |                              |                              |
|-------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Type              | I I                          | 2 I                          | 2 2                          | 3 3                          |
| W/m<br>75/65/20°C | 980                          | 1.345                        | 1.732                        | 2.389                        |
| <b>400</b>        | 294<br>203<br>0661061104     | 399<br>272<br>0662062104     | 515<br>350<br>0662062204     | 712<br>486<br>0662063304     |
| <b>500</b>        | 367<br>253<br>0661061105     | 499<br>339<br>0662062105     | 643<br>438<br>0662062205     | 889<br>607<br>0662063305     |
| <b>600</b>        | 441<br>304<br>0661061106     | 599<br>407<br>0662062106     | 771<br>525<br>0662062206     | 1.067<br>729<br>0662063306   |
| <b>700</b>        | 514<br>355<br>0661061107     | 699<br>476<br>0662062107     | 900<br>613<br>0662062207     | 1.244<br>850<br>0662063307   |
| <b>800</b>        | 588<br>405<br>0661061108     | 798<br>543<br>0662062108     | 1.029<br>701<br>0662062208   | 1.422<br>972<br>0662063308   |
| <b>900</b>        | 661<br>456<br>0661061109     | 898<br>611<br>0662062109     | 1.157<br>788<br>0662062209   | 1.600<br>1.094<br>0662063309 |
| <b>1000</b>       | 735<br>507<br>0661061110     | 998<br>679<br>0662062110     | 1.286<br>876<br>0662062210   | 1.778<br>1.215<br>0662063310 |
| <b>1100</b>       | 808<br>557<br>0661061111     | 1.098<br>747<br>0662062111   | 1.414<br>963<br>0662062211   | 1.956<br>1.337<br>0662063311 |
| <b>1200</b>       | 881<br>608<br>0661061112     | 1.197<br>815<br>0662062112   | 1.543<br>1.051<br>0662062212 | 2.134<br>1.458<br>0662063312 |
| <b>1400</b>       | 1.028<br>709<br>0661061114   | 1.397<br>951<br>0662062114   | 1.800<br>1.226<br>0662062214 | 2.490<br>1.701<br>0662063314 |
| <b>1600</b>       | 1.175<br>810<br>0661061116   | 1.596<br>1.086<br>0662062116 | 2.057<br>1.401<br>0662062216 | 2.845<br>1.944<br>0662063316 |
| <b>1800</b>       | 1.322<br>912<br>0661061118   | 1.796<br>1.222<br>0662062118 | 2.315<br>1.577<br>0662062218 | 3.200<br>2.187<br>0662063318 |
| <b>2000</b>       | 1.469<br>1.013<br>0661061120 | 1.996<br>1.358<br>0662062120 | 2.572<br>1.752<br>0662062220 | 3.556<br>2.430<br>0662063320 |
| <b>2200</b>       | 1.616<br>1.114<br>0661061122 | 2.195<br>1.494<br>0662062122 | 2.829<br>1.927<br>0662062222 | 3.912<br>2.673<br>0662063322 |
| <b>2400</b>       | 1.763<br>1.216<br>0661061124 | 2.395<br>1.630<br>0662062124 | 3.086<br>2.102<br>0662062224 | 4.268<br>2.917<br>0662063324 |
| <b>2600</b>       |                              |                              | 3.343<br>2.277<br>0662062226 |                              |
| <b>2800</b>       |                              |                              | 3.601<br>2.453<br>0662062228 |                              |
| <b>3000</b>       |                              |                              | 3.858<br>2.628<br>0662062230 |                              |


| 700                          |                              |                              |                              |
|------------------------------|------------------------------|------------------------------|------------------------------|
| I I                          | 2 I                          | 2 2                          | 3 3                          |
| 1.117                        | 1.530                        | 1.961                        | 2.712                        |
| 335<br>231<br>0661071104     | 454<br>309<br>0662072104     | 582<br>396<br>0662072204     | 805<br>547<br>0662073304     |
| 418<br>288<br>0661071105     | 568<br>386<br>0662072105     | 727<br>495<br>0662072205     | 1.006<br>684<br>0662073305   |
| 502<br>346<br>0661071106     | 681<br>463<br>0662072106     | 873<br>594<br>0662072206     | 1.207<br>821<br>0662073306   |
| 586<br>404<br>0661071107     | 795<br>541<br>0662072107     | 1.018<br>693<br>0662072207   | 1.408<br>958<br>0662073307   |
| 670<br>462<br>0661071108     | 908<br>618<br>0662072108     | 1.164<br>792<br>0662072208   | 1.609<br>1.095<br>0662073308 |
| 753<br>519<br>0661071109     | 1.022<br>695<br>0662072109   | 1.309<br>891<br>0662072209   | 1.810<br>1.232<br>0662073309 |
| 837<br>577<br>0661071110     | 1.135<br>772<br>0662072110   | 1.455<br>990<br>0662072210   | 2.011<br>1.368<br>0662073310 |
| 921<br>635<br>0661071111     | 1.249<br>850<br>0662072111   | 1.600<br>1.089<br>0662072211 | 2.212<br>1.505<br>0662073311 |
| 1.004<br>693<br>0661071112   | 1.362<br>927<br>0662072112   | 1.745<br>1.188<br>0662072212 | 2.413<br>1.642<br>0662073312 |
| 1.172<br>808<br>0661071114   | 1.589<br>1.081<br>0662072114 | 2.036<br>1.385<br>0662072214 | 2.816<br>1.916<br>0662073314 |
| 1.339<br>924<br>0661071116   | 1.816<br>1.236<br>0662072116 | 2.328<br>1.584<br>0662072216 | 3.218<br>2.189<br>0662073316 |
| 1.507<br>1.039<br>0661071118 | 2.043<br>1.390<br>0662072118 | 2.619<br>1.782<br>0662072218 | 3.621<br>2.463<br>0662073318 |
| 1.674<br>1.155<br>0661071120 | 2.270<br>1.545<br>0662072120 | 2.909<br>1.980<br>0662072220 | 4.023<br>2.737<br>0662073320 |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |

| 900                          |                              |                              |                              |
|------------------------------|------------------------------|------------------------------|------------------------------|
| I I                          | 2 I                          | 2 2                          | 3 3                          |
| 1.360                        | 1.883                        | 2.395                        | 3.334                        |
| 408<br>281<br>0661091104     | 559<br>380<br>0662092104     | 709<br>482<br>0662092204     | 982<br>662<br>0662093304     |
| 510<br>351<br>0661091105     | 699<br>476<br>0662092105     | 887<br>602<br>0662092205     | 1.228<br>827<br>0662093305   |
| 612<br>422<br>0661091106     | 838<br>570<br>0662092106     | 1.064<br>722<br>0662092206   | 1.473<br>993<br>0662093306   |
| 714<br>492<br>0661091107     | 978<br>665<br>0662092107     | 1.241<br>843<br>0662092207   | 1.719<br>1.159<br>0662093307 |
| 816<br>562<br>0661091108     | 1.117<br>760<br>0662092108   | 1.419<br>963<br>0662092208   | 1.964<br>1.324<br>0662093308 |
| 917<br>633<br>0661091109     | 1.257<br>856<br>0662092109   | 1.597<br>1.084<br>0662092209 | 2.210<br>1.490<br>0662093309 |
| 1.019<br>703<br>0661091110   | 1.397<br>951<br>0662092110   | 1.774<br>1.204<br>0662092210 | 2.455<br>1.655<br>0662093310 |
| 1.121<br>773<br>0661091111   | 1.536<br>1.045<br>0662092111 | 1.950<br>1.324<br>0662092211 | 2.700<br>1.820<br>0662093311 |
| 1.223<br>844<br>0661091112   | 1.677<br>1.141<br>0662092112 | 2.128<br>1.445<br>0662092212 | 2.946<br>1.986<br>0662093312 |
| 1.427<br>984<br>0661091114   | 1.956<br>1.331<br>0662092114 | 2.483<br>1.686<br>0662092214 | 3.438<br>2.317<br>0662093314 |
| 1.631<br>1.125<br>0661091116 | 2.235<br>1.521<br>0662092116 | 2.838<br>1.926<br>0662092216 | 3.928<br>2.648<br>0662093316 |
| 1.835<br>1.265<br>0661091118 | 2.514<br>1.711<br>0662092118 | 3.192<br>2.167<br>0662092218 | 4.419<br>2.979<br>0662093318 |
| 2.039<br>1.406<br>0661091120 | 2.794<br>1.901<br>0662092120 | 3.547<br>2.408<br>0662092220 | 4.910<br>3.310<br>0662093320 |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |
|                              |                              |                              |                              |

# CONNECTION POSSIBILITIES



Types 21 / 22 / 33

Radiator with insert on the left hand side (reversed radiator)



Types 11 / 21 / 22 / 33

Radiator with insert on the right hand side

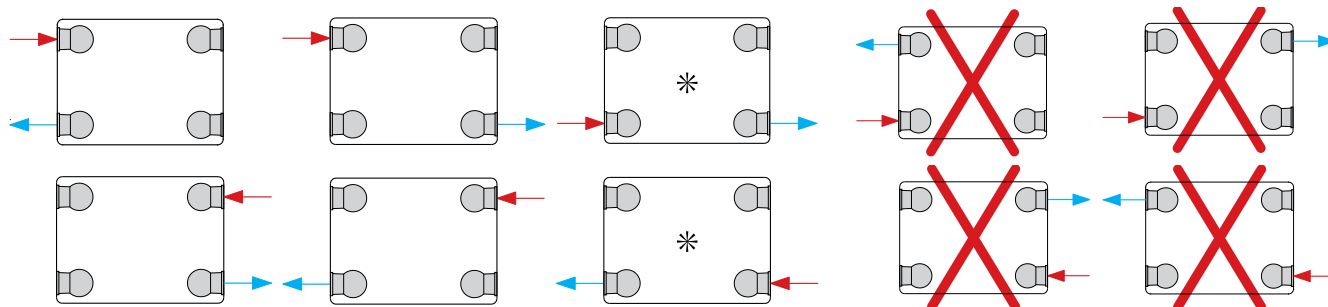


When connecting as a compact radiator the valve insert has to be removed and plastic plugs have to be replaced with brass plugs.

\* = a reduction in heatoutput will occur when combining low temperature heating with a high temperature difference between inlet and outlet.


## MOUNTING DIMENSIONS

Types 21 / 22 / 33

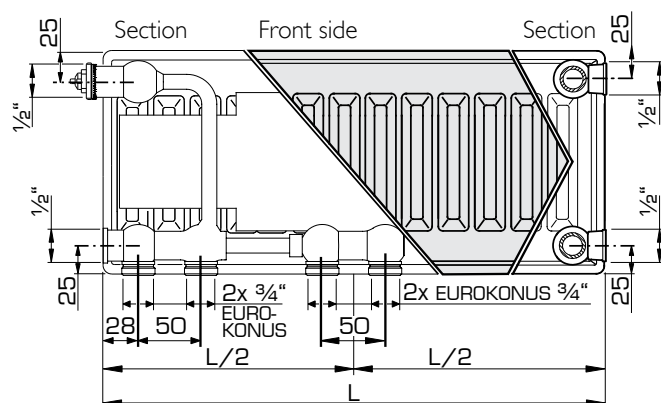


Radiator with insert on the left hand side (reversed radiator)



Types 11 / 21 / 22 / 33

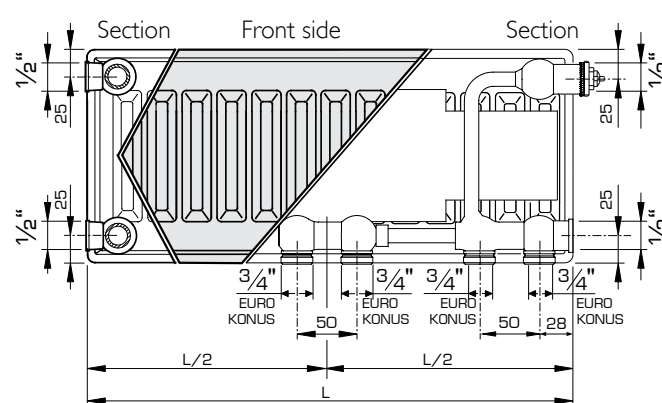

Radiator with insert on the right hand side


# J-BRACKETS (TYPE MONCLAC VDI 6036)

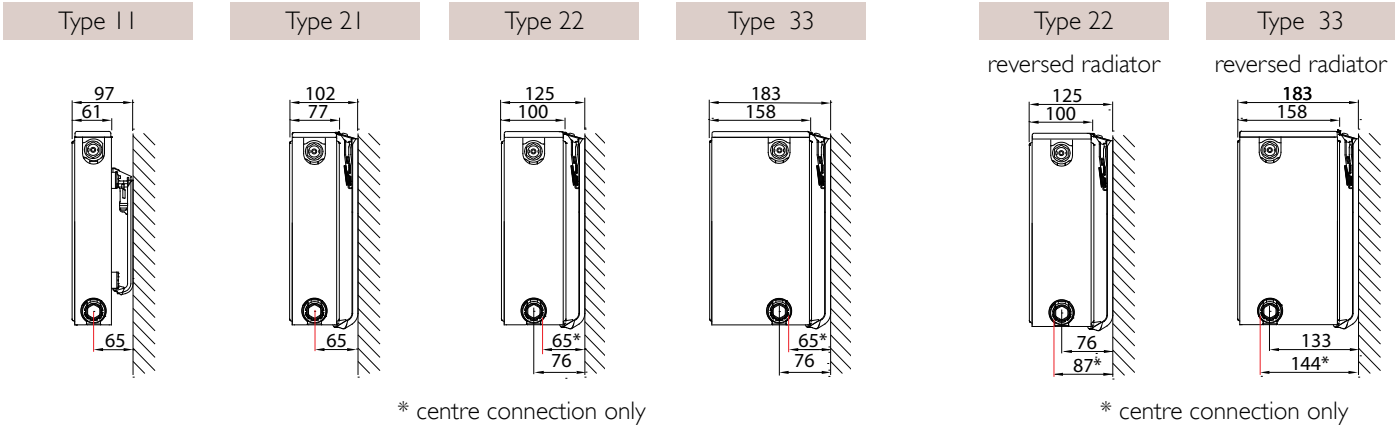


| Type 11                                                                             |     |     | Art. N°. |         | Height |
|-------------------------------------------------------------------------------------|-----|-----|----------|---------|--------|
| J-bracket VDI 6036 Class 3                                                          | x   | y   | 2 pcs.   | 3 pcs.  | mm     |
|   | /   | 140 | R509203  | R509303 | 300    |
|                                                                                     | 103 | 240 | R509204  | R509304 | 400    |
|                                                                                     | 103 | 340 | R509205  | R509305 | 500    |
|                                                                                     | 103 | 440 | R509206  | R509306 | 600    |
|                                                                                     | 103 | 540 | R509207  | R509307 | 700    |
|                                                                                     | 103 | 740 | R509209  | R509309 | 900    |
|                                                                                     |     |     |          |         |        |
| Types 21-33                                                                         |     |     | Art. N°. |         | Height |
| J-bracket VDI 6036 Class 3                                                          | x   | y   | 2 pcs.   | 3 pcs.  | mm     |
|  | 64  | 190 | R510203  | R510303 | 300    |
|                                                                                     | 64  | 290 | R510204  | R510304 | 400    |
|                                                                                     | 64  | 390 | R510205  | R510305 | 500    |
|                                                                                     | 64  | 490 | R510206  | R510306 | 600    |
|                                                                                     | 64  | 590 | R510207  | R510307 | 700    |
|                                                                                     | 64  | 790 | R510209  | R510309 | 900    |
|                                                                                     |     |     |          |         |        |

For lengths from 1800 mm: 3 brackets needed.

## LUG POSITIONS TYPE 11

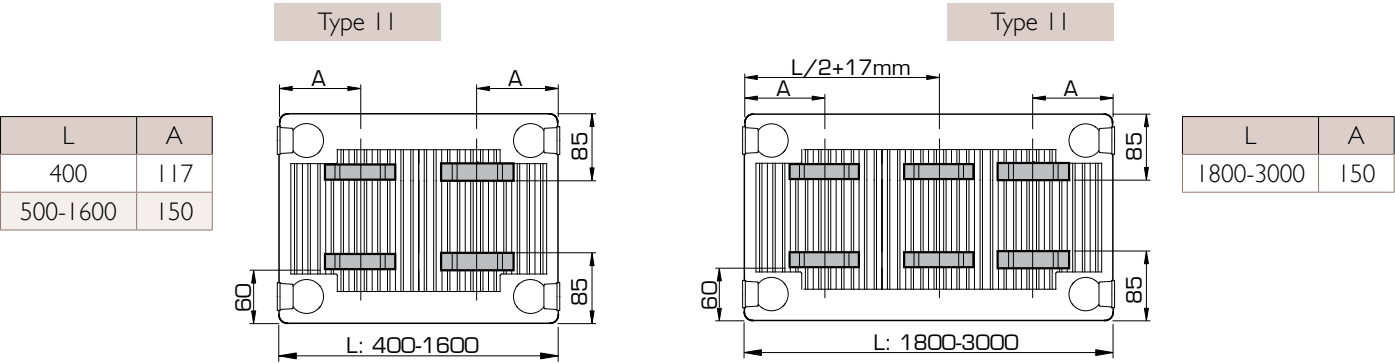

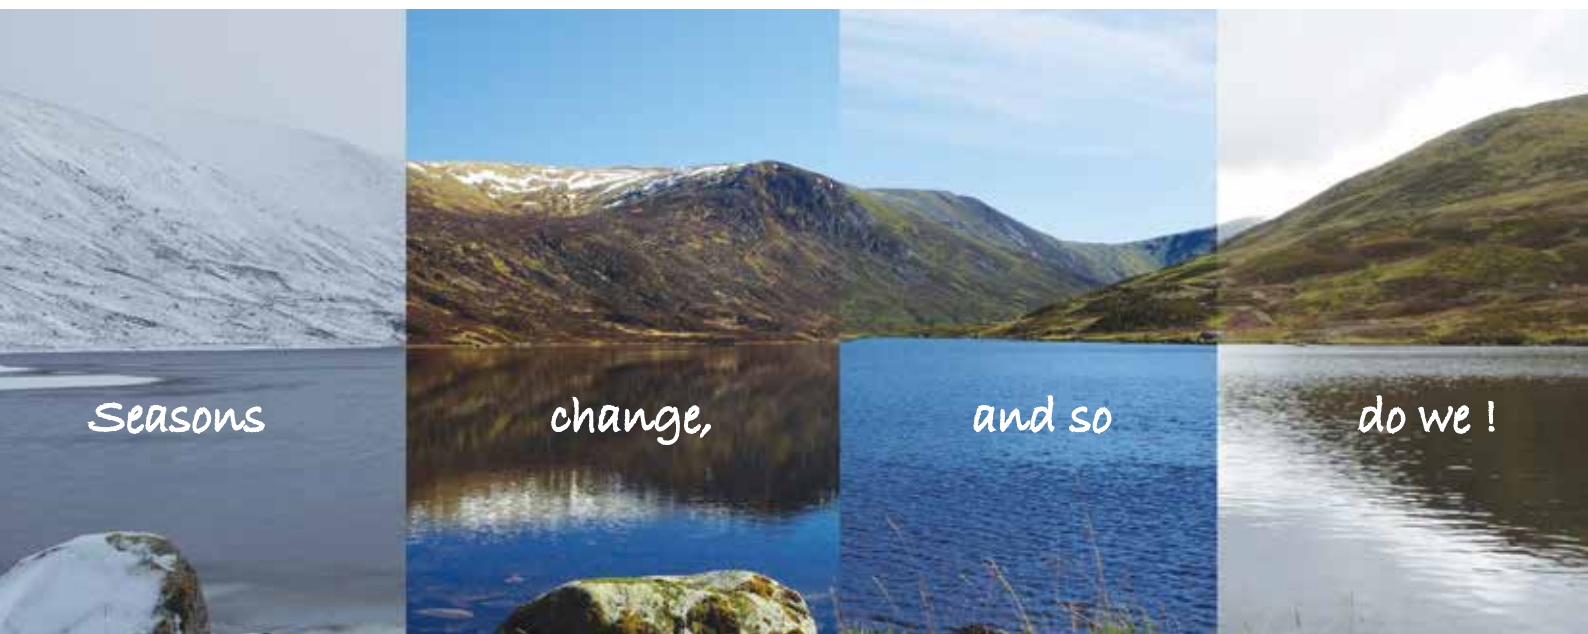

Austria • Belarus • Belgium • Cyprus • Czech Republic • Estonia • France • Germany • Greece • Iceland • Ireland • Lithuania  
Luxemburg • Norway • Poland • Portugal • Slovenia • Spain • Sweden • The Netherlands • Tunisia • Ukraine • United Kingdom

**THE NETHERLANDS**

Caradon Stelrad B.V. | Kathagen 30 | 6361 HG Nuth

**[WWW.STELRAD.EU](http://WWW.STELRAD.EU)**

