aloni
BATHROOM IDEAS

Manual for our LED-mirrors

BY versa GROUP

LED-lights

Lighting Kelvin range: 3500k - 6500k

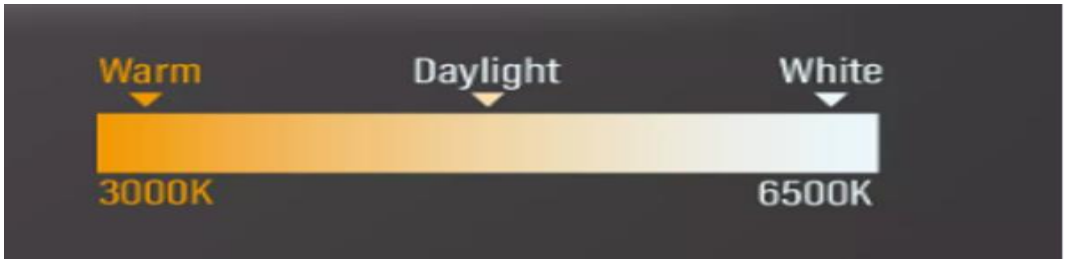

Warm light



Cold light



How to switch on/off the LED-light

Use the on/off button to trigger the LED light.

To change the color of the light, touch the on/off button for a longer period of time. The light will alternate between cold and warm white.

Frame color

RVS



Brushed copper



Brushed Gold



BLACK



Gun metal



How to install mirrors

Requirements:



Drill



Screw driver



Hammer



Tape measure



Pencil

For measurement 500 x 1000 mm

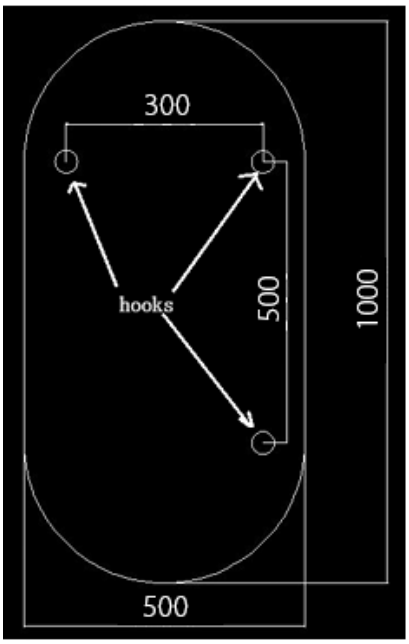

1. Start by drilling a hole in the wall, where you would like to hang the mirror.

2. To set the screw correctly, use a plastic plug first. Then insert the screw.

3. Be sure to leave 1,5 - 2 cm on the screw to hang the mirror.

4. Once you're done, hang up the mirror and make sure it is secure and stable.

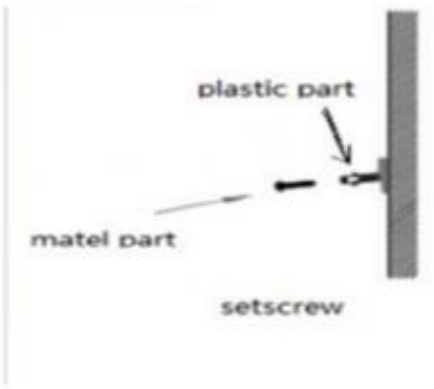

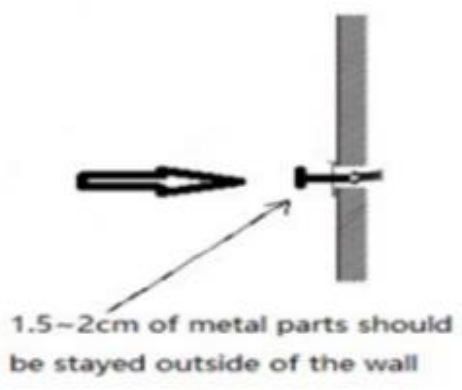

Power supplier Place back of mirror

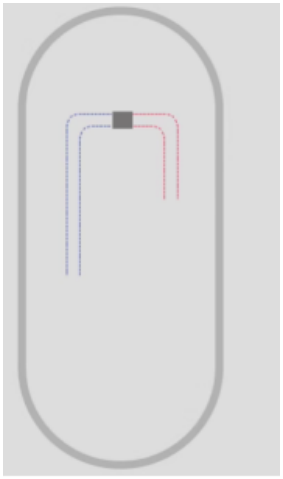

Power supplier out of mirror

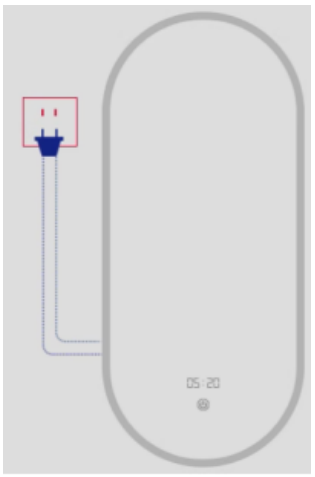

Instruction for Anti-Fog

Anti-fog:

1. If your mirror has an anti-fog function, you can trigger the heating by pressing the anti-fog button.
2. Once it is turned on, a heating symbol will be displayed.
3. To turn off the anti-fog function, simply press the anti-fog button again.

DETAILS OF MIRROR DEFOGGER

